
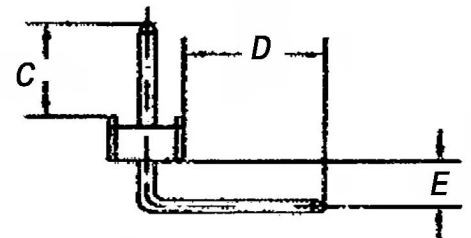
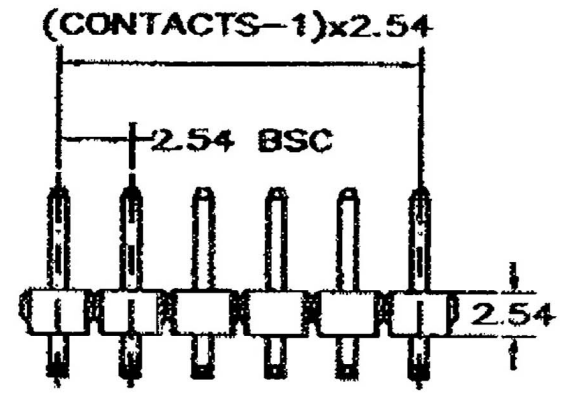
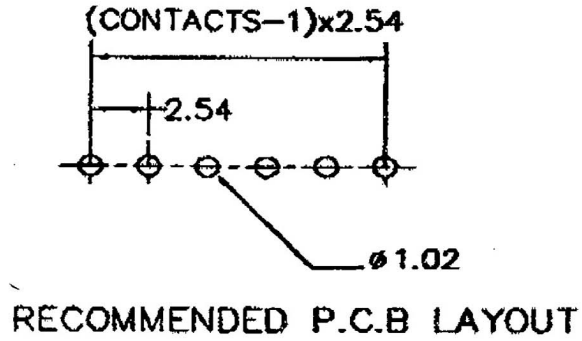


1 2 3 4 5 6 7 8

A
B
C
D
E
F
G
H

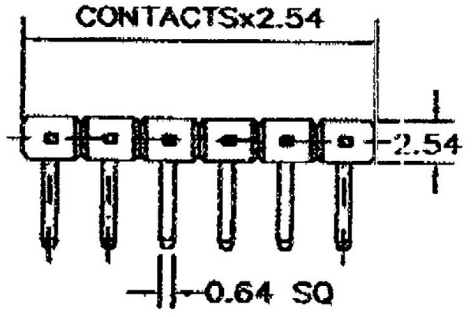

C : 3.0mm D : 6.0mm E : 3.18mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0
CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A
OPERATING TEMPERATURE: -55°C TO +105°C
CONTACT RESISTANCE : 20 MILLIOHMS MAX
INSULATION RESISTANCE : 1000 MEGAOHMS MIN
WITHSTANDING VOLTAGE: AC 1000V RMS

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 BETTY		TOLERANCE 容許公差 .0 ± .00 ± ANG. ±	PART NAME 品名 2.54mm PIN HEADER SINGLE ROW XXP RIGHT ANGLE TYPE (C=3mm D=6mm E=3.18mm)
DWG. 製圖 <i>Jolin</i>	SCALE 比例 參考	UNIT 單位 MM	PART NO. 料號 C2100-XXARXAR0R
DATE 制表日 2007/3/26	PAGE 張數 1 OF 1	REV. 版本 A	

1 2 3 4 5 6 7 8